

● General Description

It combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$.

● Features


- Low $R_{DS(ON)}$ to minimize conductive loss
- Low Gate Charge for fast switching
- Low thermal resistance
- AEC-Q101 qualified

● Application


- BLDC motor driver
- DC-DC
- Load switch



● Product Summary



TOLL



$V_{DS}=150V$

$R_{DS(ON)}=4.5mR$

$I_D=177A$



● Ordering Information

| | |
|---------------------------|----------------|
| Part NO. | ZMSA050N15HRVH |
| Marking | ZMS050N15H |
| Packing information | REEL TAPE |
| Basic ordering unit (pcs) | 2000 |

● Absolute Maximum Ratings ($T_A=25^{\circ}C$, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Max. | Unit |
|----------------------------------|---------------|---|------|------|-------------|
| Drain-source voltage | V_{DS} | | - | 150 | V |
| Gate-source voltage ^① | V_{GS} | | -20 | 20 | V |
| Continuous drain current | I_D | $V_{GS}=10V, T_C=25^{\circ}C$ | - | 177 | A |
| | I_D | $V_{GS}=10V, T_C=75^{\circ}C$ | - | 145 | A |
| | I_D | $V_{GS}=10V, T_C=100^{\circ}C$ | - | 125 | A |
| Pulsed drain current | I_{DM} | Pulsed; $t_p \leq 10 \mu s; T_C = 25^{\circ}C$ | - | 708 | A |
| Diode continuous current | I_S | $V_{GS}=0V, T_C=25^{\circ}C$ | - | 177 | A |
| Diode pulse current | $I_{S,pulse}$ | $V_{GS}=0V, Pulsed, t_p \leq 10 \mu s, T_C = 25^{\circ}C$ | - | 708 | A |
| Total power dissipation | P_D | $V_{GS}>6V, T_C=25^{\circ}C$ | - | 405 | W |
| Total power dissipation | P_D | $V_{GS}>6V, T_A=25^{\circ}C$ | - | 5 | W |
| Operating junction temperature | T_J | | -55 | 175 | $^{\circ}C$ |
| Storage temperature | T_{STG} | | -55 | 175 | $^{\circ}C$ |
| Single pulse avalanche energy | E_{AS} | $L=0.1mH, V_{GS}=10V, R_g=25\Omega$ | - | 304 | mJ |
| | | $L=0.5mH, V_{GS}=10V, R_g=25\Omega$ | - | 547 | mJ |

| | | |
|-----------------|--|---------|
| ESD level (HBM) | | CLASS 2 |
|-----------------|--|---------|

● Thermal resistance

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|--|--------------------------|------|------|------|------|
| Thermal resistance, junction - case | R_{thJC} | - | - | 0.37 | °C/W |
| Thermal resistance, junction - ambient | R_{thJA}^{\circledast} | - | - | 30 | °C/W |
| Soldering temperature | T_{sold} | - | - | 260 | °C |


● Electronic Characteristics ($T_j=25^{\circ}C$, unless otherwise specified)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------------|--------------|---|------|------|-----------|------------|
| Drain-source breakdown voltage | BV_{DSS} | $V_{GS}=0V, I_D=250\mu A$ | 150 | - | - | V |
| Gate threshold voltage | $V_{GS(th)}$ | $V_{GS}=V_{DS}, I_D=250\mu A$ | 2 | 2.7 | 4 | V |
| Drain-source leakage current | I_{DSS} | $V_{GS}=0V, V_{DS}=150V$ | - | - | 1 | μA |
| Gate- source leakage current | I_{GSS} | $V_{GS}=\pm 20V, V_{DS}=0V$ | - | - | ± 100 | nA |
| Static drain-source on resistance | $R_{DS(on)}$ | $V_{GS}=10V, I_D=24A, T_j=25^{\circ}C$ | - | 4.5 | 5.6 | m Ω |
| | | $V_{GS}=10V, I_D=24A, T_j=175^{\circ}C$ | - | 10.4 | - | m Ω |
| Forward transconductance | g_{FS} | $V_{DS}=5V, I_{SD}=10A$ | - | 31 | - | S |
| Diode forward voltage | V_{FSD} | $V_{GS}=0V, I_{SD}=24A$ | - | 0.8 | 1.3 | V |


● Dynamic characteristics ($T_j=25^{\circ}C$, unless otherwise specified)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------------|--------------|--|---|------|------|----------|
| Input capacitance | C_{iss} | $f=1MHz, V_{DS}=75V, V_{GS}=0V$ | - | 4496 | - | pF |
| Output capacitance | C_{oss} | | - | 1165 | - | pF |
| Reverse transfer capacitance | C_{rss} | | - | 25 | - | pF |
| Gate resistance | R_g | $f=1MHz$ | - | 3.4 | - | Ω |
| Total gate charge | Q_g | $V_{DD}=75V, I_D=24A, V_{GS}=10V$ | - | 64.6 | - | nC |
| Gate-source charge | Q_{gs} | | - | 18 | - | nC |
| Gate-drain charge | Q_{gd} | | - | 14.3 | - | nC |
| Turn-on delay time | $t_{D(on)}$ | $V_{GS}=10V, V_{DS}=75V, R_G=3.3\Omega, I_D=24A$ | - | 23 | - | ns |
| Turn-on rise time | t_r | | - | 55 | - | ns |
| Turn-off delay time | $t_{D(off)}$ | | - | 28 | - | ns |
| Turn-off fall time | t_f | | - | 6 | - | ns |
| Reverse recovery time | t_{rr} | | $V_{DD}=75V, di/dt=100A/\mu s, I_S=24A$ | - | 125 | - |
| Reverse recovery charge | Q_{rr} | | - | 52 | - | nC |


● Fig.1 Gate-source voltage as a function of gate charge; Typical values; $T_j=25^\circ\text{C}$

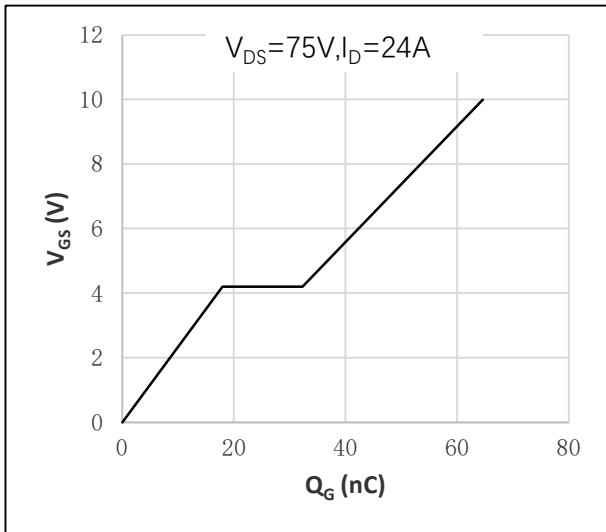


● Fig.2 Input, output and reverse transfer capacitances as a function of drain-source voltage; Typical values; $T_j=25^\circ\text{C}$

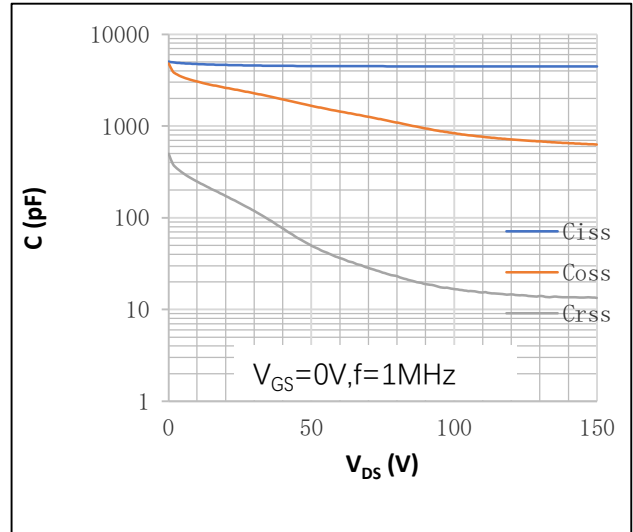


● Fig.3 Output characteristics: drain current as a function of drain-source voltage; Typical values; $T_j=25^\circ\text{C}$

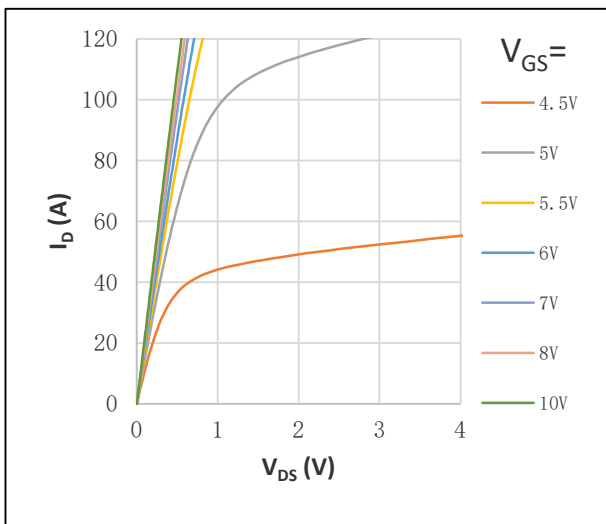


● Fig.4 Output characteristics: drain current as a function of drain-source voltage; Typical values: Expanded curve; $T_j=25^\circ\text{C}$

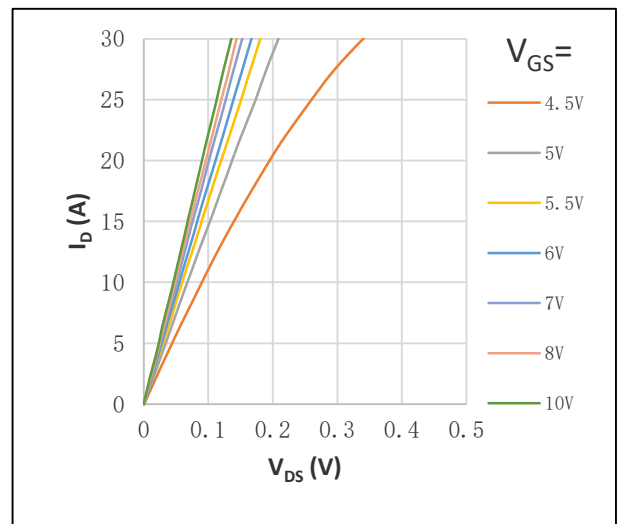


● Fig.5 Gate-source threshold voltage as a function of junction temperature; Typical values

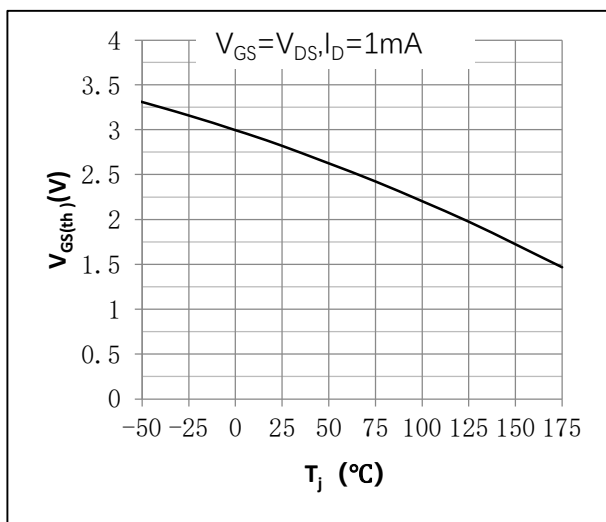


● Fig.6 Drain-source on-state resistance as a function of drain current; Typical values; $T_j=25^\circ\text{C}$

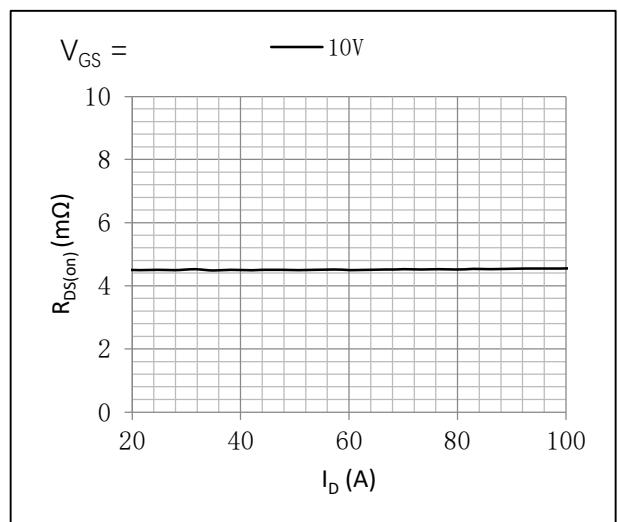


● Fig.7 Drain-source on-state resistance as a function of gate-source voltage; Typical values

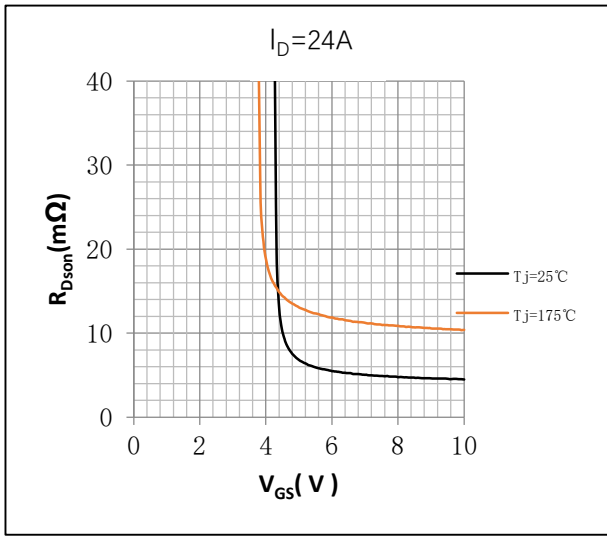


● Fig.8 Normalized drain-source on-state resistance factor as a function of junction temperature; Typical values Normalized On-Resistance = $R_{DS(on)}/R_{DS(on)}(25^{\circ}C)$

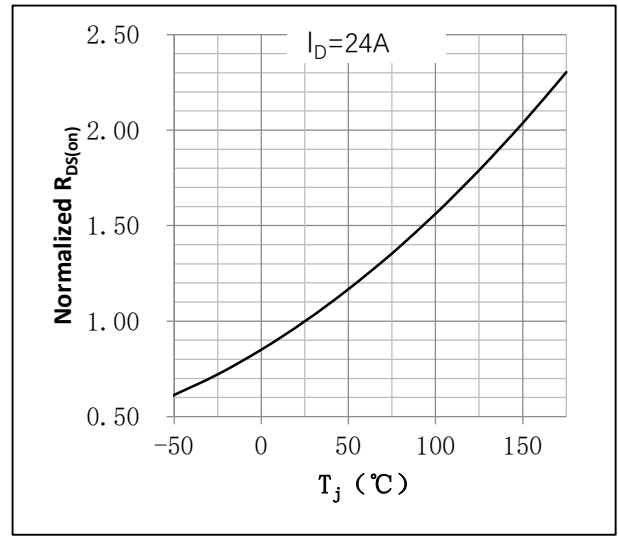


● Figure 9. Source (diode forward) current as a function of source-drain (diode forward) voltage; Typical values

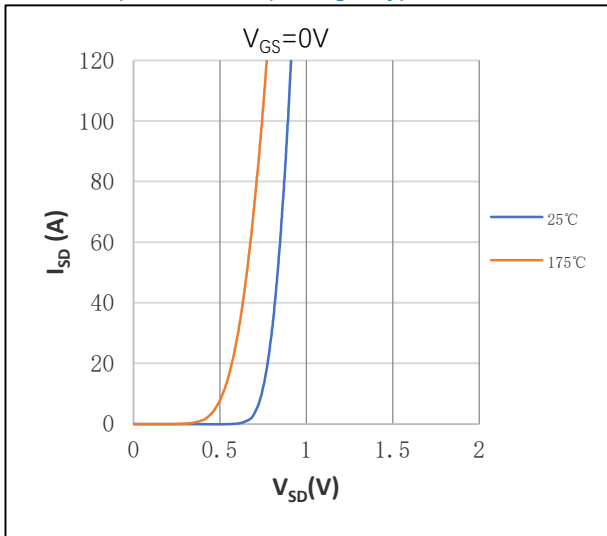


● Figure 10. Transfer characteristics: drain current as a function of gate-source voltage; Typical values

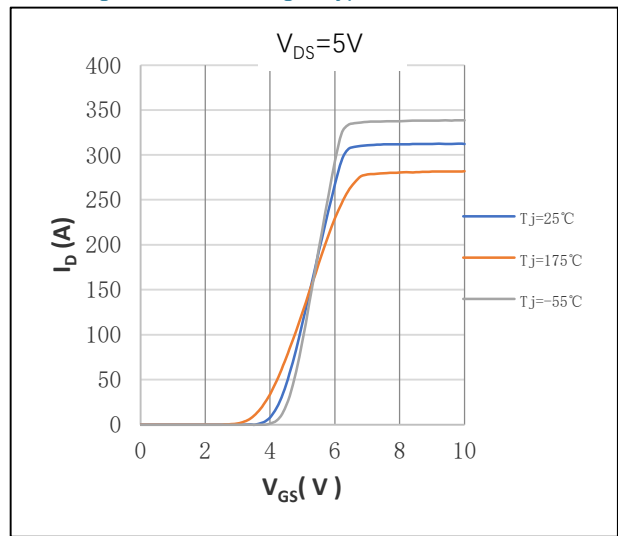


● Fig.11 Safe operating area: continuous and peak drain currents as a function of drain-source voltage; Calculative values

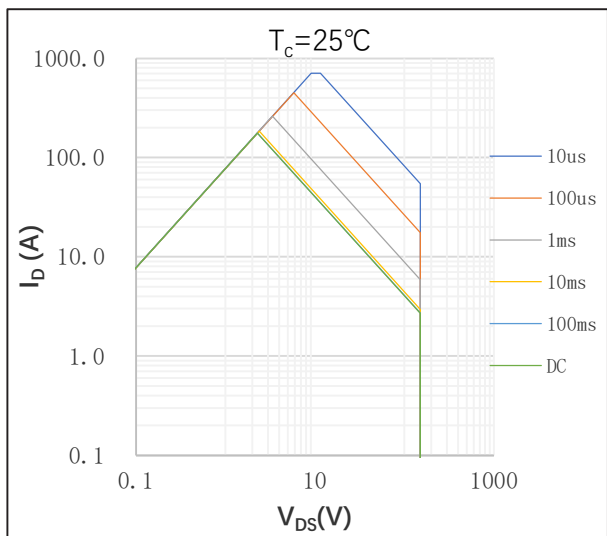


● Fig.12 Continuous drain current as a function of case temperature; Calculative values

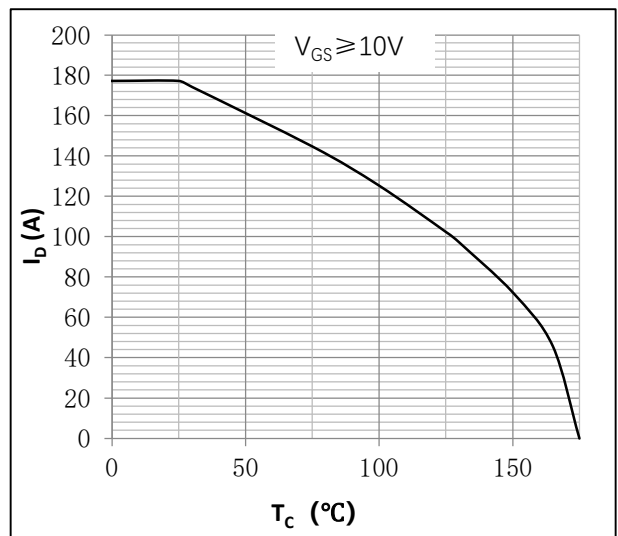


● Fig.13 Drain-source breakdown voltage as a function of junction temperature; Typical values Normalized $BV_{DSS} = BV_{DSS} / BV_{DSS}(25^{\circ}C)$

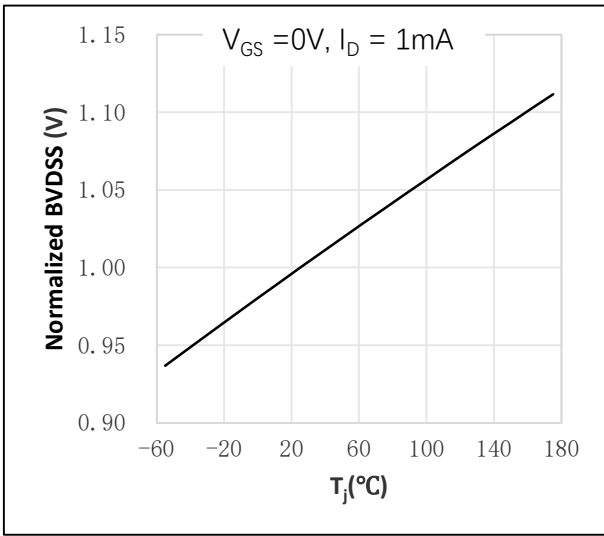


● Fig.14 Normalized total power dissipation as a function of case temperature; Calculative values Normalized Power Dissipation = $P_d / P_d(25^{\circ}C)$

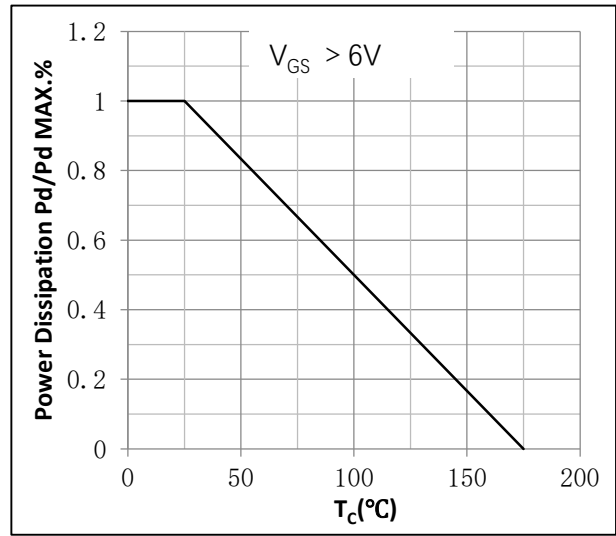

● Fig.15 Transient thermal impedance from junction to case as a function of pulse duration; max values

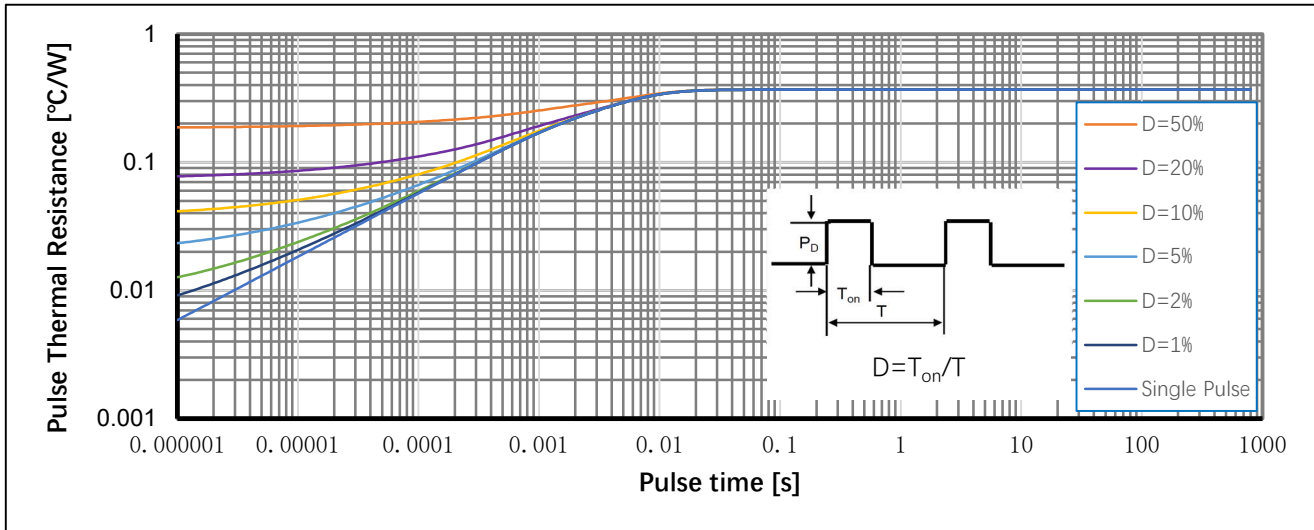

● Package Outline

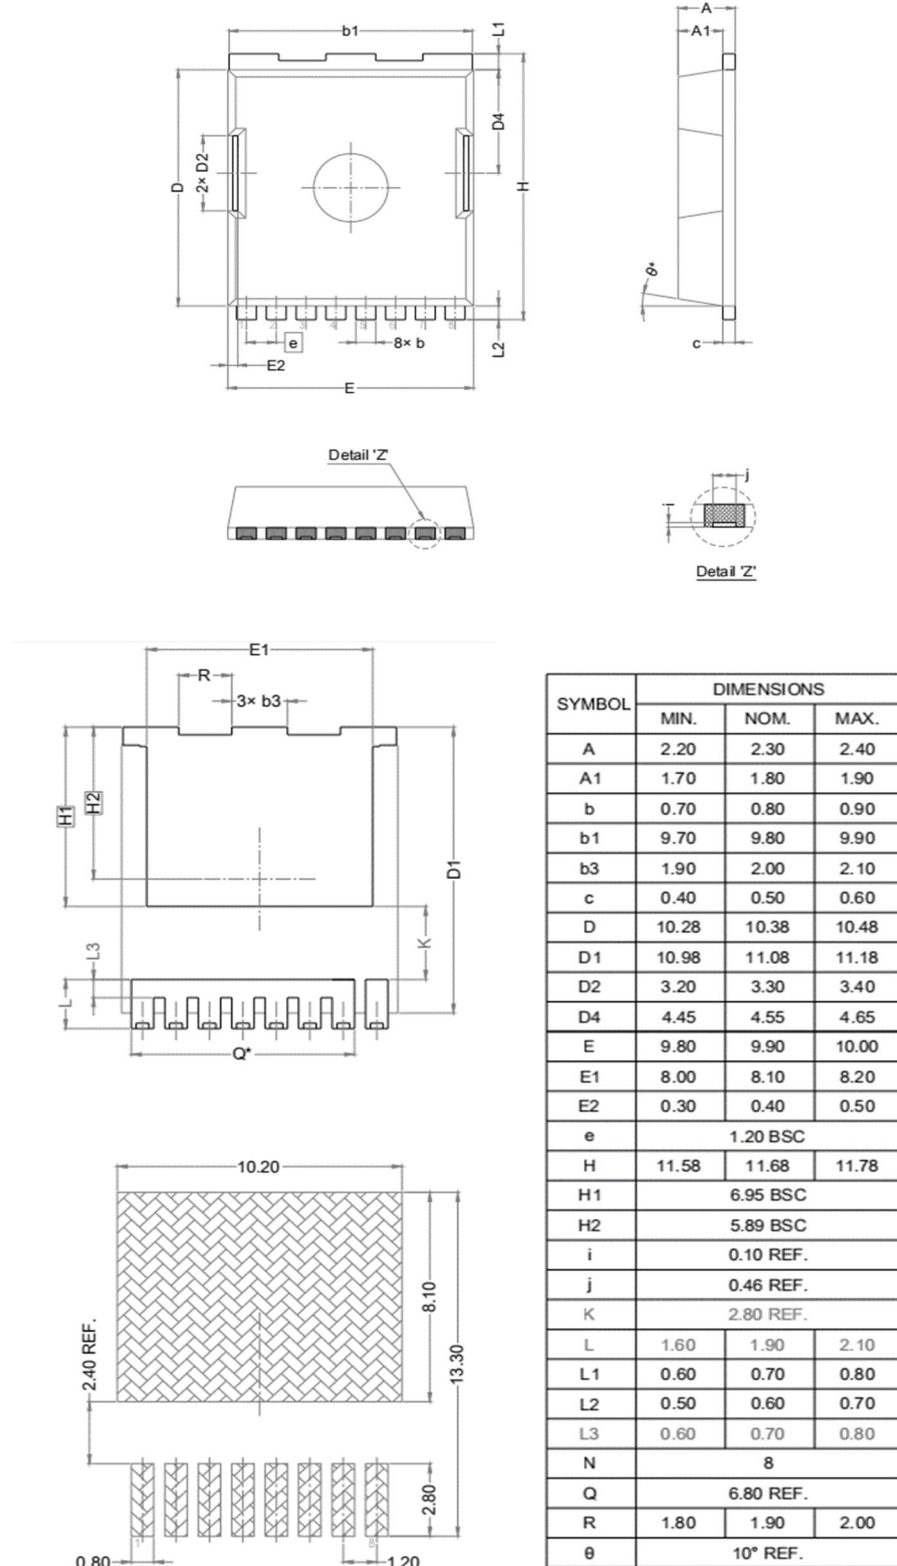

● Note

- ① Pulse : $V_{GS}=+20V/-20V$, Duty cycle=50%, $T_j=175^{\circ}C$, $t=1000$ hours; For DC , the following test conditions can be passed: $V_{GS}=+20V/-10V$, $T_j=175^{\circ}C$, $t=1000$ hours;
- ② Device mounted on FR-4 substrate PC board, 2oz copper, with thermal bias to bottom layer 1inch square copper plate;
- ③ Practically the current will be limited by PCB, thermal design and operating temperature. $V_{GS}=10V$.

● Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from ZMJ SEMICONDDUCTORS CO., LTD.
- ZMJ SEMICONDDUCTORS CO., LTD. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- ZMJ SEMICONDDUCTORS CO., LTD. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- ZMJ SEMICONDDUCTORS CO., LTD. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. ZMJ SEMICONDDUCTORS CO., LTD. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify ZMJ SEMICONDDUCTORS CO., LTD. for any damages resulting from such improper use or sale.
- Since ZMJ uses lot number as the tracking base, please provide the lot number for tracking when complaining.

● Revision History

| Version | Date | Change |
|---------|----------|--------|
| A | 2026.3.6 | New |
| | | |
| | | |
| | | |
| | | |